HL-0138 ASSEMBLY INSTRUCTIONS

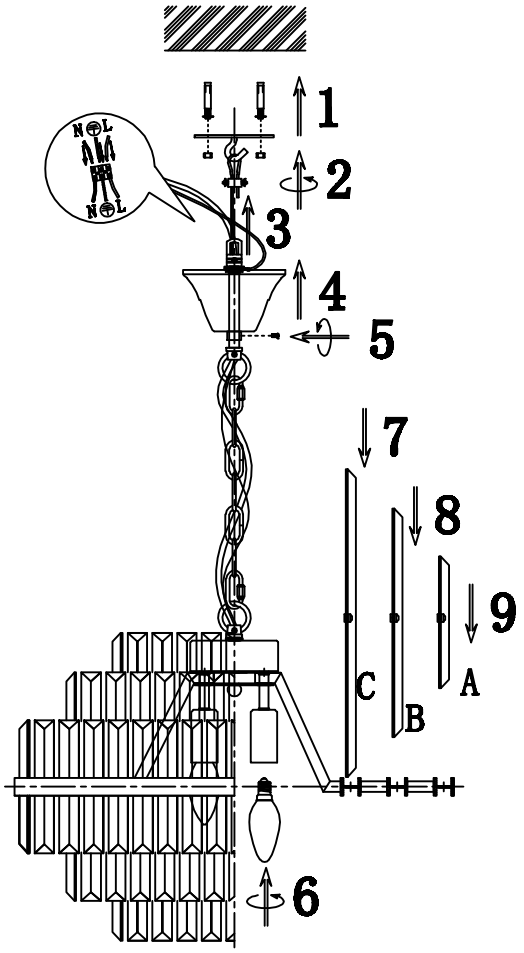
Please read carefully and save these instructions, as you may need them later. CAUTION!




Turn off the main power at circuit breaker before installing the fixture, in order to prevent possible shock. All glass is fragile, use care when handling . The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors which cannot be built into any product.

These factors must be applied by the person(s) caring for and operating the fixture.

Power connection to be made by qualified personnel in accordance with the National Electrical Code. Please connect power according to the table below.

Fixture Conductor Marking	Connect to AC Power Conductors
Live Conductor [Black or Brown]	Line Voltage Conductor[Black]
Neutral Conductor [White or Blue]	Neutral Conductor [White]
Ground Conductor [Green or Bare]	Ground Conductor [Green or Bare]



C	B	A
		
28+1pcs	39+1pcs	51+2pcs